# COMMERCIAL DATA SHEET Quadra Sparkling 4100 XL



## Billi Quadra Sparkling 4100 with XL Levered Dispenser

The Quadra Sparkling is the ultimate in modern design and filtered drinking water appliances delivering instant boiling and chilled filtered water, with the added luxury of sparkling water.

Utilising underbench ice bank technology to enhance capacity and recovery, all three output options are conveniently delivered by operating the DDA compliant position sensitive levers on the single above bench XL levered dispenser.

The Quadra Sparkling has a commercial capacity and is suitable for any environment.







BOILING

CHILLED SPARKLING



XL Levered Dispenser

Quadra Sparkling Under-Bench Unit

## **Features**











SAFE TO OPERATE

ECO-INTELLIGENCE TECHNOLOGY

ADJUSTABLE CHILLED TEMPERATURE

ADJUSTABLE SPARKLING LEVEL

ICE BANK TECHNOLOGY









PLUS MODEL AVAILABLE

RANGE OF FINISHES

HACCP CERTIFIED

ITALO-AUSTRALIAN PARTNERSHIP

# Australian Made Boiling Unit \* Italian Design & Made Sparkling Unit

# PRODUCT SPECIFICATIONS

Billi.

Water type	Product code	Model name	Dispenser	Suggested no. of people	Boiling water delivery (cups per hour)*	Chilled & Sparkling water delivery (cups per hour)	Power supply (amps)
BOILING CHILLED							
BOILING CHILLED	906100L	Quadra Sparkling 4100	XL Levered	Up to 100	25	200	1 x 10 1 x 15

## Accessories

SPARKLING

992800 - 70mm Riser & Font

992820 - 70mm Riser





992830 - 120mm Riser



990726 - Tubing Extension Kit for Sparkling unit - 2mtrs

## **Finishes**

Standard Finishes

MB - Matte Black

CH - Chrome

BR - Brushed

RG - Rose Gold

Special Order Finishes

BRG - Brushed Rose Gold

GM - Gun Metal Grey

Add the Finish code to the Product Code to finalise your specification, eg. 906100LMB

MW - Matte White

PL - Platinum


ım UB - Urban Bı

<sup>\*</sup> Based on the initial number of cups of boiling water immediately available, drawn one cup every 10 seconds. For all underbench filtered water systems, consideration may be needed for usage patterns and draw-off methods. 1 cup = 170ml

## **TECHNICAL DRAWING & INSTALLATION REQUIREMENTS**

## PRODUCT DIMENSIONS

# 217mm 184.5mm 137.5mm bench thickness 1mm-48mm 140mm

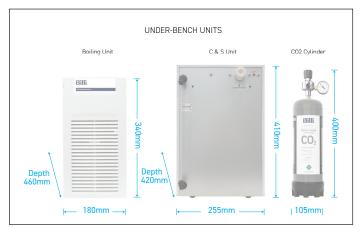

## **WATER SUPPLY**

A single 1/2" BSP (15mm) stop-tap with a male thread should be installed in an easily accessible position. Water supply must be microbiologically safe to drink, with a minimum dynamic water pressure of 250kPa and a maximum of 1000kPa.


## **POWER SUPPLY**

A standard 10 amp power outlet plus an additional standard 15 amp outlet are required. Both outlets located no further than 1000mm from the underbench unit. The system is supplied with a 1 metre flex cord and plug.

## **FILTRATION**

Billi's range of premium filters utilise BWT's unique Fibron X technology. Billi's filter range provides superior taste, water quality, consistent filter life and peace of mind when it comes to hygiene. Filter supplied: 994051 (5 micron). Replacement filters available: 994052 (0.2 micron), 994054 (HSD), 994055 (XPHSD), 994056 (Sediment only) and 994060 (0.2 micron sediment only).

## PREFERRED INSTALLATION LAYOUT

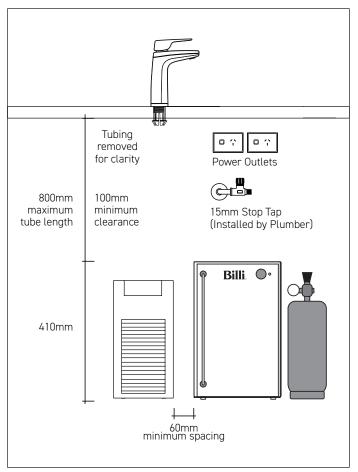

## **CERTIFICATIONS**

Every Billi drinking water appliance is manufactured under a certified quality control system. All Billi commercial range models have been tested and comply with all required standards including: Watermark: WM-022690; Tested to ATS5200.105 and AS/NZ 4020; ISO 9001:2015, QEC 11627; AS1428; HACCP: PE-872-WAT-1-02; WELL Cornerstone Member.

## CO<sub>2</sub> Cyclinder

The  $\mathrm{CO}_2$  gas cylinder supplied must be secured in a suitable location. Each cylinder contains 1100g of  $\mathrm{CO}_2$  and should be installed in a well ventilated area. Each cylinder will provide between 200-350L of sparkling water depending on the unit settings. The MSDS is available on www.billi.com.au for a complete list of specifications and warnings. Replacement gas cylinders are available from Billi.  $\mathrm{CO}_2$  Cylinder - single 996911 or double 996912.

## WARRANTY

The Billi Quadra Sparkling Range is covered by a comprehensive 2 year warranty on all parts and labour.













**Billi Australia Pty Ltd** 42 Lucknow Crescent, Thomastown, Victoria 3074 Australia

P 1800 812 321 F +61 3 9469 0499 W www.billi.com.au



